


# Pallet and Packaging information SHARP PV Modules

Applicable to the following 108 cell module types: **NU-JCxxxB, NU-JCxxx**

Pallet Size		Delivery Information		Name of Packing	Material	Weight
Length Width	1,754 mm 1,125 mm	Modules per pallet	36 pcs	Packing Carton	Corrugated paper	8.56 kg
Height single stack	1,245 mm	Modules per truck (40 feet)	936 pcs	Pallet	Plywood	17.9 kg
Height double stack	2,490 mm	Pallets per truck (40 feet)	26 pcs	Plastic Strap	PET	0.97 kg
Single stack weight (pallet + modules)	780 kg	Module direction on pallet	upright on long side	Plastic Wrap	PEL5D98	1.41 kg
Double stack weight (pallets + modules)	1,560 kg					

## Pallet Side View (Double Stack)

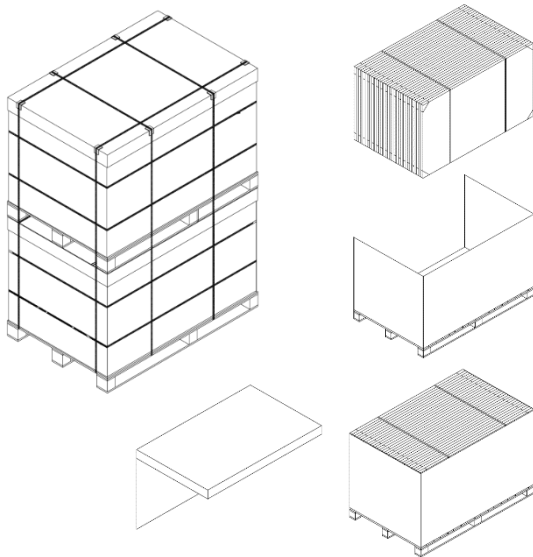

## Storage And Transportation

Max. Stacking for storage	2 pallets
Max. Stacking for transportation	2 pallets

## Shipment Data Sheet

SHIPMENT DATA SHEET					
Pallet: X123456789					
PACKING DATE		: 202x-xx-xx			
MODEL NO		: NU-JC410B			
No.	Serial No.	Pmax(W)	No.	Serial No.	Pmax(W)
18	X12345678912	410,00	36	X12345678912	410,00
17	X12345678912	410,00	35	X12345678912	410,00
16	X12345678912	410,00	34	X12345678912	410,00
15	X12345678912	410,00	33	X12345678912	410,00
14	X12345678912	410,00	32	X12345678912	410,00
13	X12345678912	410,00	31	X12345678912	410,00
12	X12345678912	410,00	30	X12345678912	410,00
11	X12345678912	410,00	29	X12345678912	410,00
10	X12345678912	410,00	28	X12345678912	410,00
9	X12345678912	410,00	27	X12345678912	410,00
8	X12345678912	410,00	26	X12345678912	410,00
7	X12345678912	410,00	25	X12345678912	410,00
6	X12345678912	410,00	24	X12345678912	410,00
5	X12345678912	410,00	23	X12345678912	410,00
4	X12345678912	410,00	22	X12345678912	410,00
3	X12345678912	410,00	21	X12345678912	410,00
2	X12345678912	410,00	20	X12345678912	410,00
1	X12345678912	410,00	19	X12345678912	410,00

## Label Information

<b>SHARP</b>		PHOTOVOLTAIC MODULE MODEL : NU-JC410B	
MAXIMUM POWER (+5%/-0%) (Pmax)		410W	
OPEN-CIRCUIT VOLTAGE (+10%/-10%) (Voc)		37.79V	
SHORT-CIRCUIT CURRENT (+10%/-10%) (Isc)		13.81A	
VOLTAGE AT POINT OF MAX. POWER (Vmpp)		31.30V	
CURRENT AT POINT OF MAX. POWER (Impp)		13.10A	
NOTE: IRRADIANCE OF 1000W/m <sup>2</sup> , AM1.5 SPECTRUM AND CELL TEMPERATURE OF 25°C			
MAXIMUM SYSTEM VOLTAGE		1000V	
OVER-CURRENT PROTECTION		25A	
FIRE RESISTANCE CLASS(IEC61730-2:2004)		CLASS C	
TYPICAL WEIGHT		20.7kg	
SHARP CORPORATION 1 Takumi-cho, Sakai-ku, Sakai-shi, Osaka 590-8522, Japan			
EU	SHARP ELECTRONICS GmbH Nagelsweg 33-35, 20097 Hamburg, Germany <a href="http://www.sharp.eu">www.sharp.eu</a>		
UK	SHARP ELECTRONICS (EUROPE) Limited 4 Furzeground Way, Stockley Park, Uxbridge Middlesex, UB11 1EZ, United Kingdom		
IDENTIFICATION CODE : SERIAL NUMBER :			
MADE IN CHINA			

- Module No. 1 stands in a opposite orientation to the other modules on the pallet.
- Pallet documentation shows:
  - Model No.
  - Pallet serial number and barcode
  - Packing date
  - Module serial number and barcode
  - Electrical Power Pmax (W)
- EAN Code is not available